

FIG. 1

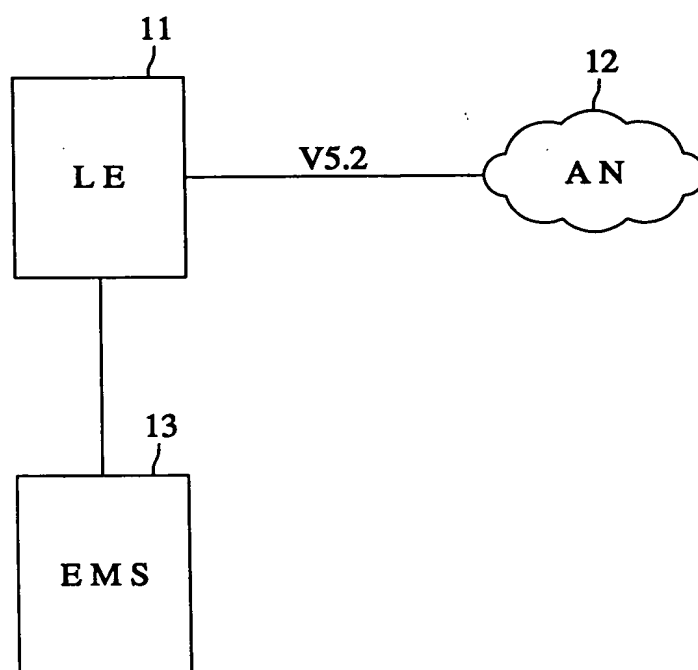


FIG. 2A

"01-S01:V5ID = 100,PSTN = ON,CTRL = OFF,BCC = OFF,LINKC = OFF,PROT = OFF,HEX = ON

V5ID = 100, PORTID = 3001

V5ID = 100, PORTID = 2005

...

V5ID = 100, PORTID = 0008

SUBSCRIBER REGISTERED IN V5ID=100.
TEN SUBSCRIBERS ARE ACCOMMODATED
AT THE MAXIMUM

FIG. 2B

"01-S01:V5ID = 100, PSTN = ON, CTRL = ON, BCC = OFF, LINKC = OFF, PROT = OFF, HEX = ON"

"01-S02:V5ID = 160, PSTN = OFF, CTRL = ON, BCC = OFF, LINKC = ON, PROT = OFF, HEX = ON"

"01-S03:V5ID = 200, PSTN = OFF, CTRL = OFF, BCC = OFF, LINKC = ON, PROT = OFF, HEX = OFF"

DISPLAYING FOR ALL THE REGISTERED
V5 INTERFACE ID

...

V5ID = 10, PORTID = 3001

V5ID = 10, PORTID = 2005

V5ID = 160, PORTID = 3002

...

V5ID = 100, PORTID = 0008

DISPLAYING ALL THE REGISTERED SUBSCRIBERS.
UP TO TEN SUBSCRIBERS AT THE MAXIMUM

FIG. 3B


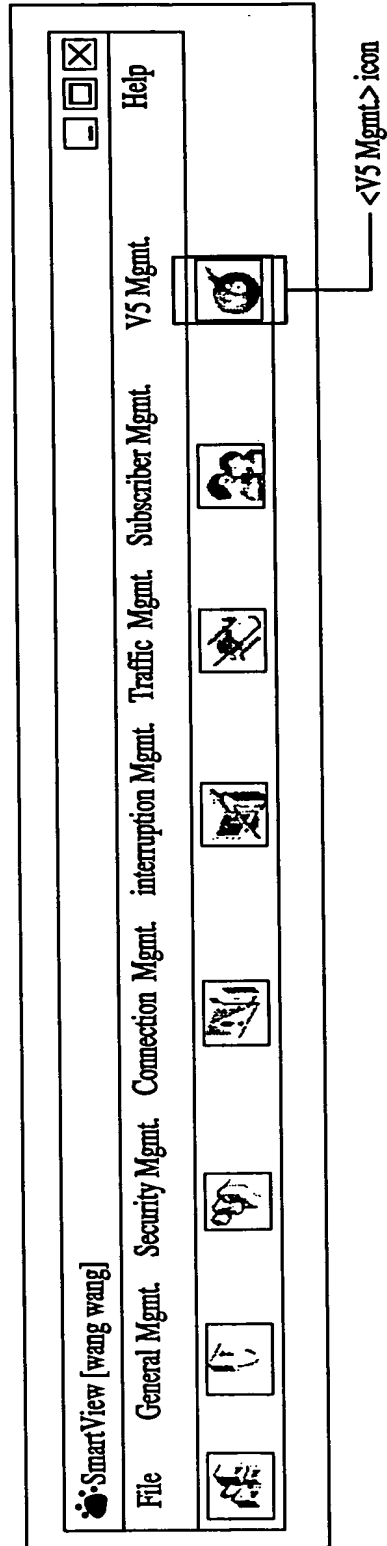


FIG. 3C

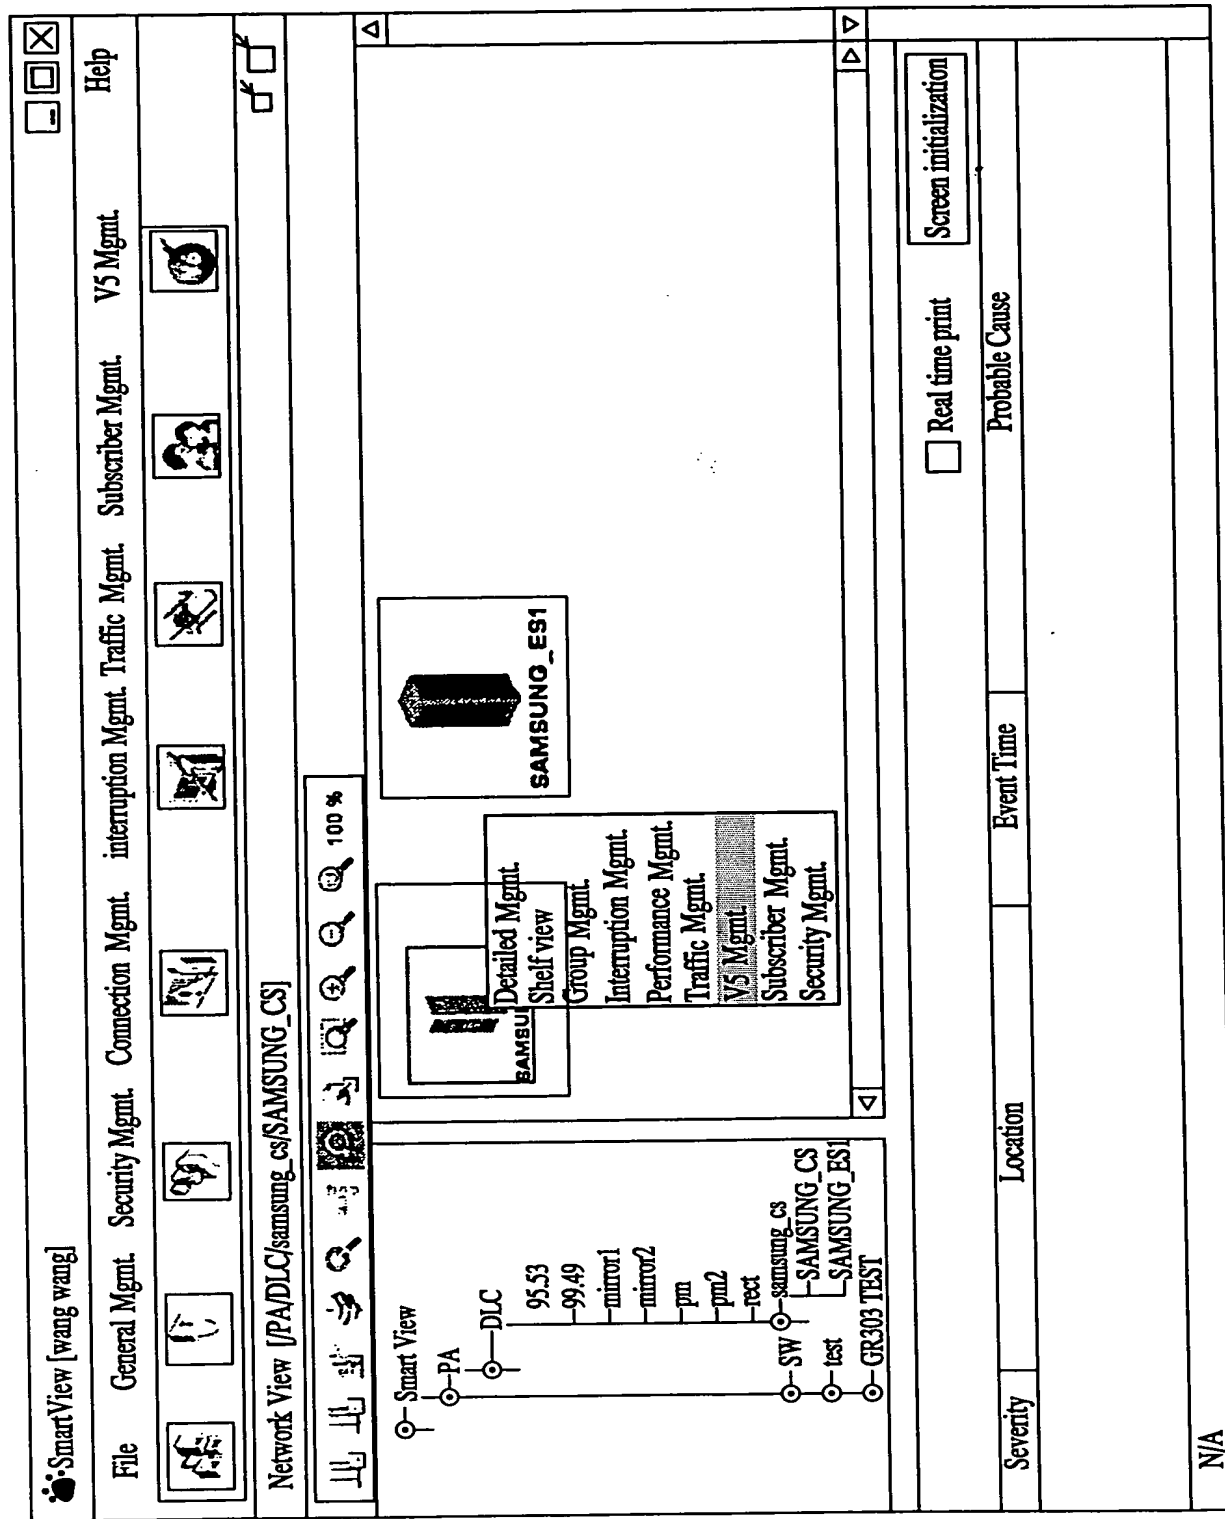

[illegible]

FIG. 4A

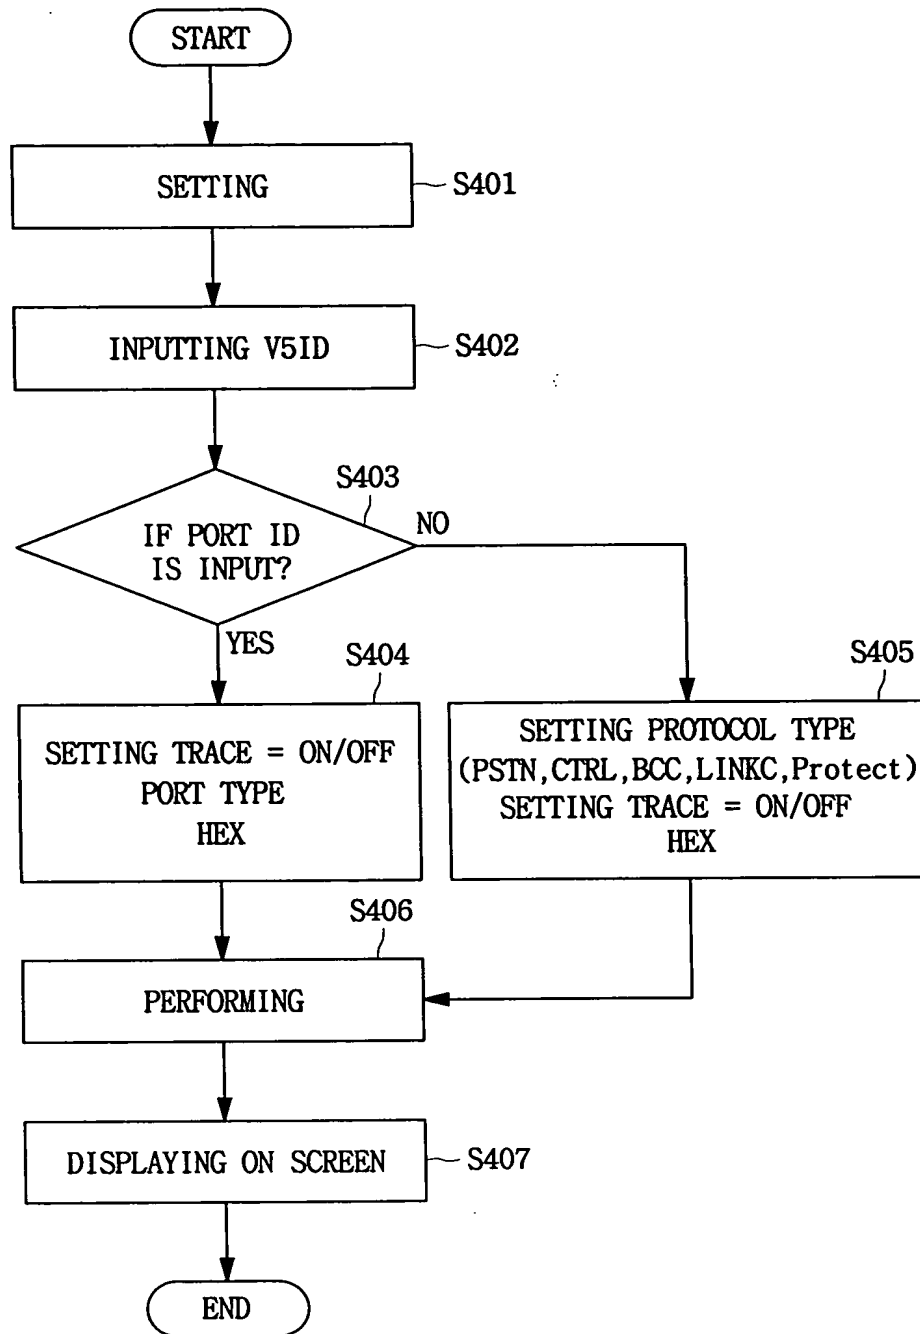


FIG. 4B

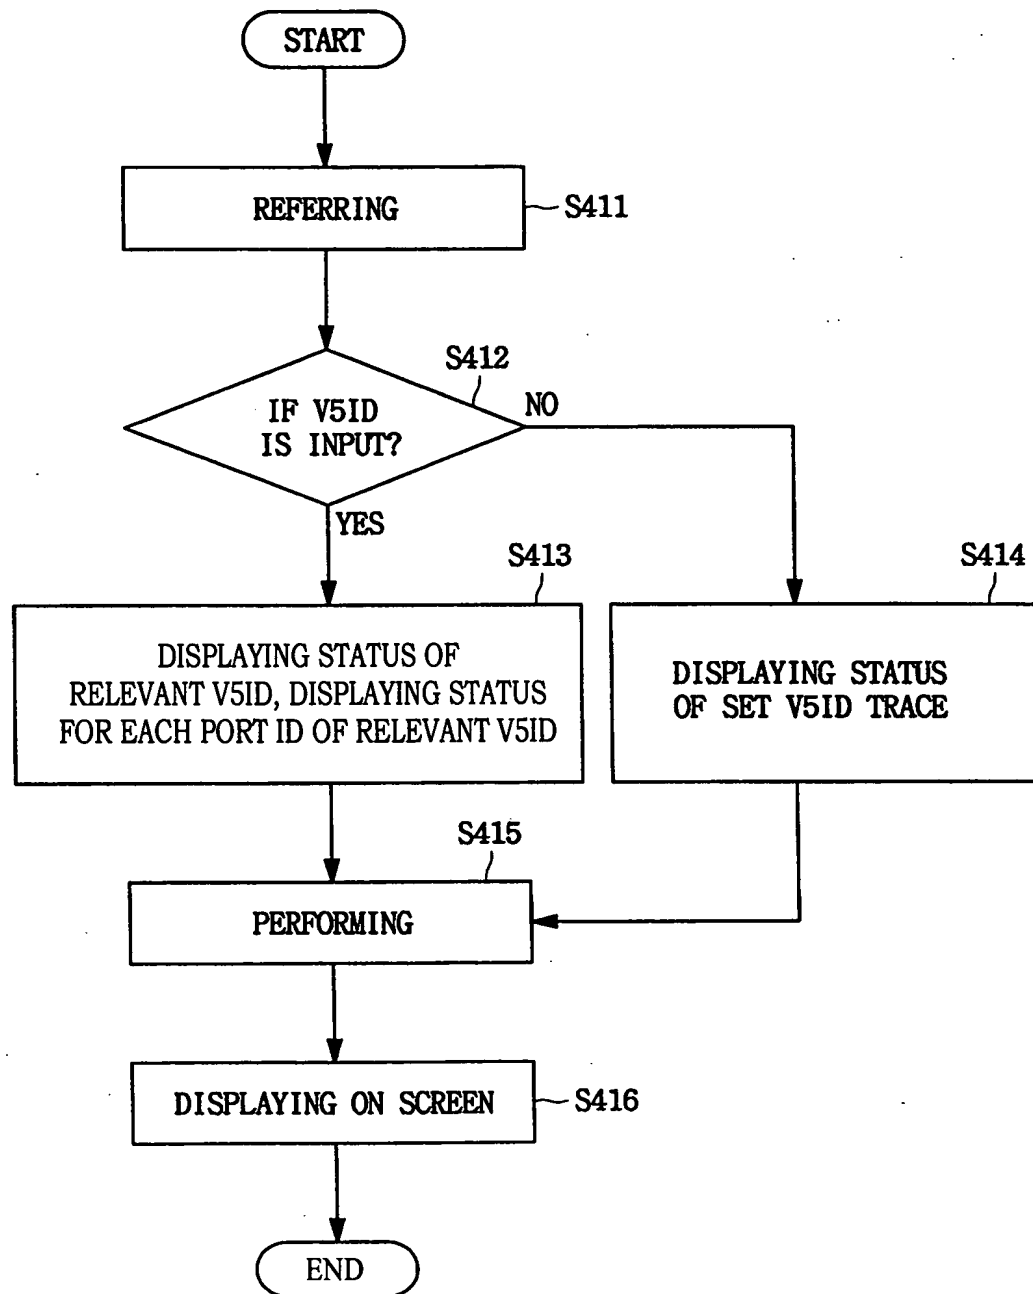


FIG. 5

